

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
1 February 2001 (01.02.2001)

PCT

(10) International Publication Number  
**WO 01/07502 A2**

- (51) International Patent Classification<sup>7</sup>: C08G 61/10,  
61/02, C09K 11/06
- (21) International Application Number: PCT/GB00/02850
- (22) International Filing Date: 24 July 2000 (24.07.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
9917356.9 24 July 1999 (24.07.1999) GB
- (71) Applicant (for all designated States except US): CAM-BRIDGE DISPLAY TECHNOLOGY LIMITED [GB/GB]; Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0HJ (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): HOLMES, Andrew, Bruce [AU/GB]; 19 Newton Road, Cambridge CB2 2AL (GB). GENESTE, Florence, Danielle, Annie [FR/FR]; 3 bis, rue Charles Hardouin, F-35530 Noyal Sur Vilaine (FR). MARTIN, Rainer, Eugen [AT/DE]; Baslerstrasse 23a, D-79639 Grenzach/Wyhlen (DE). CACIALLI,
- Franco [IT/GB]; 52 Brampton Road, Cambridge CB1 3HL (GB).
- (74) Agents: DANIELS, Jeffrey, Nicholas et al.; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— Without international search report and to be republished upon receipt of that report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 01/07502 A2

(54) Title: POLYMERISATION METHOD

(57) Abstract: A method for making a polymer or oligomer comprising the steps of: (a) making a first monomer comprising a substituted aromatic or heteroaromatic group by: (i) providing an aromatic or heteroaromatic group substituted with first and second director groups; (ii) performing metalation at a first position on the aromatic or heteroaromatic group; (iii) performing electrophilic substitution so as to provide a first substituent group at the first position; and (b) contacting in a reaction mixture the first monomer with at least two further monomers that independently are the same or different from the first monomer under conditions so as to form a polymer or oligomer; wherein the nature and positions of the first and second director groups regioselect the first position.

BEST AVAILABLE COPY

**POLYMERISATION METHOD**

The present invention relates to a method for making a polymer or oligomer and to polymers or oligomers preparable by or prepared by the method. Use of the polymers or oligomers also is provided.

More specifically, the present invention is directed to conjugated molecules, oligomers and polymers for use in electric, electronic, optical and optoelectronic devices, e.g. small molecule and polymer based light emitting devices such as light emitting diodes (LEDs). In particular, the present invention concerns a process for the synthesis of aromatic precursors which when coupled together in controlled C-C bond forming processes afford luminescent, conjugated molecules, oligomers, macromolecules and polymers.

High photoluminescence efficiency in the solid state is a prerequisite for organic semiconductors capable of light emission through charge injection under an applied field (electroluminescence). Processes which deliver aromatic precursor molecules suitably disposed for participation in polymerisation coupling reactions are advantageous in the design of new conjugated systems for applications in luminescent devices. Much evidence is developing that variation of substitution patterns can afford improved efficiencies in photoluminescence.

There exist several known procedures for coupling aromatic monomers to afford conjugated polymers or oligomers, particularly for use in luminescent devices. One such method is Gilch dehydrohalogenation polycondensation of 1,4-bis(halomethyl) aromatic derivatives. This method is

described in documents such as Gilch, et al. *J Poly Sci.* 1-A, 1966, 4, 1337; Wudl, U.S. Pat. 5,189,136/1990; H.Spreitzer, W. Kreuder, H. Becker, and H. Schoo WO 98/27136; H. Becker, H. Spreitzer, K. Ibrom and W. Kreuder, *Macromolecules*, 1999, 32, 4925-4932. The Gilch dehydrohalogenation method depends in particular on either radical bromination of the corresponding dimethyl derivative or halomethylation of a reactive precursor. The former suffers from low yields owing to electrophilic halogenation of the aromatic ring. This occurs particularly when there are further substituents on the aromatic ring that are activating groups for electrophilic substitution. The latter requires electron rich aromatic precursors for good yields in the halomethylation. The halomethylation reaction is particularly unattractive for large scale manufacturing owing to the likely formation during the process of methyl halomethyl ether (where the halo is Cl or Br) which is a potent carcinogen.

A further known polymerisation reaction is Suzuki (Pd catalysed) cross coupling of boronic acid derivatives with vinyl and aryl halides as described in Schlüter and Wegner, *Acta Polym.*, 1993, 44, 59. This reaction often is referred to as "Suzuki" polymerisation.

Another known polymerisation reaction is Horner Wittig polycondensation of bis(phosphonates) with dicarbonyl compounds. This method is discussed in Kreuder et al.WO 96/10617 (1996); *Chem. Abstr.*, 1996, 124, 345038u.

Yamamoto, *Progr. Polym. Sci.*, 1992,17, 1153 discloses a still further polymerisation reaction involving nickel-catalysed cross coupling of aromatic dibromo-derivatives. This reaction often is referred to as "Yamamoto" polymerisation.

Polymerisation by McMurry coupling of dicarbonyl derivatives is described in Feast, et al., Abstracts of Papers of the American Chemical Society, 1998, Vol.215 (Pt2), pp.322-POLY; and Daik et al., New JChem., 1998, 22, 1047.

The synthesis of certain monomers for use in the above polymerisation reactions will be recognised as problematic by those skilled in this art. This has the consequence that the range of polymers obtainable by these polymerisation reactions is limited.

Poly(p-arylene vinylenes) (PPVs) are generally described in WO98/27136.

A silyl-disubstituted PPV derivative is disclosed in Synthetic Metals, 101, (1999) 216-217. The two silyl substituent groups are the same. The poly[2,5-bis(dimethyloctyl silyl)-1,4-phenylene-vinylene] polymer was synthesised from 2,5-bis(bromomethyl)-1,4-bis(dimethyloctyl silyl) benzene through a dehydrohalogenation polycondensation reaction.

Outside the field of polymerisation, the concept of directed metalation of bis-carbamates and urethanes has been reported, for example in Snieckus Pure Appl. Chem., 1994, 66, 2155; Bower et al. J. Org Chem., 1998, 63, 1514; and V. Snieckus, Chem. Rev., 1990, 90, 879-933. However, this concept has not been disclosed or suggested as a step in a method for making a polymer or oligomer.

The present inventors have identified a need to provide an improved method for providing monomers for use in the above-mentioned polymerisation reactions.

Accordingly, it is an aim of the present invention to provide an improved method for making a polymer or oligomer.

It is a further aim of the present invention to provide polymers and oligomers prepared by and preparable by the improved method.

It is a further aim of the present invention to provide an optical device or component therefor comprising the polymers and oligomers which are the subject of the present invention.

It is a further aim of the present invention to provide a use for the polymers which are the subject of this invention.

Finally, it is a further aim of the present invention to provide a method for making an optical device or component therefor using the polymers which are the subject of the present invention.

Accordingly, in a first aspect of the present invention there is provided a method for making a polymer or oligomer comprising the steps of: (a) making a first monomer comprising a substituted aromatic or heteroaromatic group by: (i) providing an aromatic or heteroaromatic group substituted with first and second director groups; (ii) performing metalation at a first position on the aromatic or heteroaromatic group; (iii) performing electrophilic substitution so as to provide a first substituent group at the first position; and (b) contacting in a reaction mixture the first monomer with at least two further monomers that independently are the same or different from the first monomer under conditions so as to form a polymer or oligomer; wherein

the nature and positions of the first and second director groups regioselect the first position.

In a second aspect of the present invention there is further provided a, preferably soluble, polymer or oligomer prepared in accordance with the method defined in the first aspect.

In a third aspect of the present invention there is still further provided a, preferably soluble, polymer or oligomer preparable in accordance with the method defined in the first aspect, having a repeat unit comprising an aromatic or heteroaromatic group with first and second linked positions and first and second director groups X and Y where X is ortho to the first linked position and Y is ortho to the second linked position group and X and Y are the same or different and independently comprise a hydroxyl, alkoxy, alkoxyalkyl, amide, halide, haloalkyl, amino, aminoalkyl, carboxylic acid ester, urethane, carbamate, sulphonamide, sulphurylalkyl, or carbamide group; and A is C, O, S or NR and n = 0; or A is C or NR, B is C or NR, n=1 and R is a pendant group, preferably hydrocarbyl, optionally containing one or more heteroatoms.

In a fourth aspect of the present invention there is still further provided a, preferably soluble, polymer or oligomer preparable in accordance with the method defined in the first aspect having a repeat unit comprising a substituted or unsubstituted vinylene group and an aromatic or heteroaromatic group having first and second silyl substituent groups X' and Y' that are different from each other where X' is ortho to a first linked position and Y' is ortho to the vinylene group.

In a fifth aspect of the present invention there is still further provided an optical device or component therefor

comprising: a first charge carrier injecting layer for injecting positive charge carriers (an anode); a second charge carrier injecting layer for injecting negative charge carriers (a cathode); a light-emissive layer located between the charge carrier injecting layers for accepting and combining positive and negative charge carriers to generate light; wherein the light-emissive layer comprises a polymer or oligomer as defined in any one of the second, third or fourth aspects of the present invention.

In a sixth aspect of the present invention there is still further provided use of a polymer or oligomer as defined in any one of the second, third or fourth aspects of the present invention in an optical device.

In a seventh aspect of the present invention there is still further provided a method for making an optical device or component therefor comprising the steps of: (a) providing a polymer or oligomer as defined in the second, third or fourth aspects of the present invention; and (b) including the polymer or oligomer in an optical device or component therefor.

In the first aspect, the present invention provides an efficient method of synthesis for a monomer comprising a substituted aromatic or heteroaromatic group for polymerising to form a polymer or oligomer. One advantage of the present method is the ability to control the substituents, which can be introduced sequentially, and therefore can be different from one another.

For the purposes of the present invention, the term "oligomers" is intended to encompass trimers, tetramers and

higher order oligomers up to 5. The term "polymers" is intended to encompass all materials having a degree of polymerisation greater than an oligomer.

Also, for the purposes of the present invention, the phrase "aromatic or heteroaromatic group" is intended to encompass mononuclear aromatic groups and polynuclear aromatic groups. A mononuclear aromatic group has only one aromatic ring, for example phenyl or phenylene. A polynuclear aromatic group has two or more aromatic rings which may be fused (for example naphthalene, quinoline or indole), individually covalently linked (for example biphenyl) and/or a combination of both fused and individually covalently linked aromatic rings. Preferably, the aromatic or heteroaromatic group is substantially conjugated over substantially the whole group.


Performing metalation at a first position in step (ii) can be by the replacement of any suitable group, for example hydrogen, or halogen (e.g. Cl, I or Br). However, it is preferred that metalation is performed by the replacement of hydrogen at the first position.

A first substituent group is provided at the first position in step (iii). This first substituent may be provided directly by electrophilic substitution at the first position. Alternatively, the first substituent may be provided by electrophilic substitution followed by one or more additional steps.

This method is particularly suitable for functionalising aromatic or heteroaromatic groups in a manner which is not easily realisable by alternative synthetic strategies. In this regard, an aromatic or heteroaromatic group that is

asymmetrically substituted has previously been difficult to prepare. Asymmetric ring substitution of aromatic or heteroaromatic groups, particularly polyarylene vinylenes is expected to disrupt interchain packing. When such groups are included asymmetrically in a polymer or oligomer this leads to increased luminescence efficiencies as discussed in M.R. Andersson G.Yu, and A.J. Heeger, *Synth. Met.*, 1997, 85, 1275.

The polymer DMOS-PPV 6 which is known from D.-H. Hwang, S.T. Kim, H.K. Shim, A.B. Holmes, S.C. Moratti and R.H. Friend, *Chem. Commun.*, 1996, 2241-2242 can be prepared in good yield in accordance with the present method. This can be seen from the reaction scheme shown below:

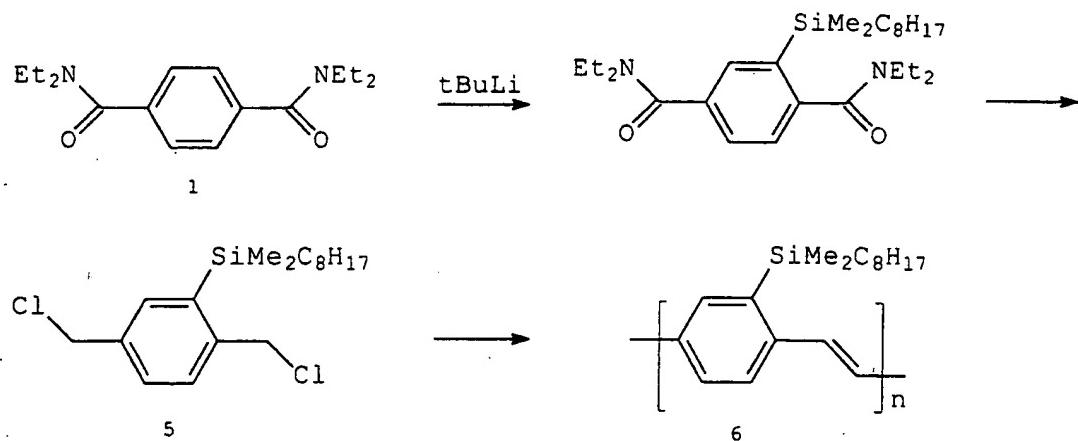

In a second embodiment of the first aspect of the present invention, step (a) further comprises a step (iv) of performing metalation at a second position on the aromatic or heteroaromatic group; and a step (v) of performing electrophilic substitution so as to provide a second substituent group at the second position; wherein the nature and position of the first and second director groups regioselect the second position.

Performing metalation at a second position in step (iv) can be by the replacement of any suitable group, for example hydrogen, or halogen (e.g. Cl, I or Br). However, it is preferred that metalation is performed by the replacement of hydrogen at the first position.

A second substituent group is provided at the second position in step (v). This second substituent may be provided directly by electrophilic substitution at the second position. Alternatively, the second substituent may be provided by electrophilic substitution followed by one or more additional steps.

The first and second substituent group are the same or different. Preferably, the first and second substituent groups are different.

It is preferred that the first and/or second substituent groups in the present method independently are selected from the group consisting of halide,  $B(OH)_2$ ,  $B(OR)_2$ , alkoxy, alkoxyalkyl, alkyl, hydroxyl, aryl, heteroaryl,  $SnR_3$ , silyl, amide, and  $COCF_3$ . Of these groups, it is more preferable that the first and/or second substituent groups independently are selected from the group consisting of Br, I,  $SiMe_2C_8H_{17}$ ,  $SiMe_2C_{10}H_{21}$ , and  $SiMe_3$ .

)  
Preferably, the aromatic or heteroaromatic group is asymmetrically substituted.

Referring to the metalation steps of the present method, metalation can be performed by the addition to the reaction mixture of any suitable organo-metal derivative such as an organo lithium derivative or stannane, boronic acid or ester,

copper reagent (Cu I), zinc reagent (Zn II), magnesium reagent (Mg II) or nickel reagent (Ni II, Ni 0). However, organo-lithium is preferred and tBuLi is most preferred.


Where metalation is by replacement of hydrogen, it is preferred that metalation is performed by the addition to the reaction mixture of organo lithium derivative, optionally followed by trans metalation using the reagents as outlined above.

Steric and inductive effects of the nature and positions of the first and second director groups must be considered in the present method.

Preferably, the nature and positions of the first and second director groups regioselect the first position to be ortho to the first director group.

Also preferably, the nature and positions of the first and second director groups regioselect the second position to be ortho to the second director group.

Where the nature and positions of the first and second director groups select both the first position to be ortho to the first director group and the second position to be ortho to the second director group, a possible reaction scheme is shown below:

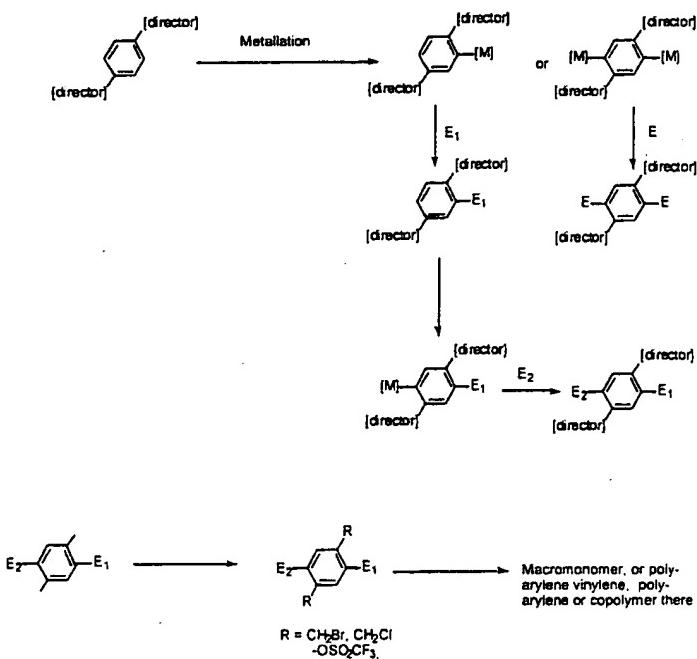

$E$  is, for example,  $\text{Br}$ ,  $\text{I}$ ,  $\text{B(OH)}_2$ ,  $\text{B(OR)}_2$ ,  $\text{OR}$ ,  $\text{OH}$ ,  $\text{Ar}$ ,  $\text{R}$ , heteroaromatic,  $\text{SnR}_3$ ,  $\text{SiR}_3$ ,  $\text{SiR}_1\text{R}_2\text{R}_3$ ,  $\text{NR}_2$  or  $\text{COCF}_3$  and  $\text{R}$  is a pendant group, preferably hydrocarbyl, optionally containing one or more heteroatoms.

Analogous reactions can be envisaged for any heteroaromatic or aromatic starting material suitably functionalised with two "director" groups. Specifically the route could lead conveniently to substituted fluorene derivatives and naphthalene derivatives.

The first and second director groups are the same or different.

Conveniently, the first and second director groups independently are selected from alkoxy, alkoxyalkyl, amide, halide, haloalkyl, amino, aminoalkyl, carboxylic acid ester,

urethane, carbamate, sulphonamide, sulphurylalkyl, or carbamide.

In the present method, it is preferable that the first and second director groups independently are selected from the group consisting of CONEt<sub>2</sub>, CONHCMe<sub>2</sub>Ph, OCONMeCMe<sub>2</sub>Ph, OCONEt<sub>2</sub> and SO<sub>2</sub>NHCMe<sub>2</sub>Ph SO<sub>2</sub>-tBu.

*N,N*-diethylcarboxamide (-CONEt<sub>2</sub>) and urethane (e.g. -OCONEt<sub>2</sub>) director groups can be used to direct metatlation, for example, with t-butyl lithium to adjacent (ortho) positions. The resulting organo-lithium can be alkylated, silylated, boronated, or stannylated and converted into a range of organometallic derivatives for new C-C bond formation to the aromatic ring. The resulting metal derivative can be cross coupled with suitable precursors in a polymerisation reaction.

In a third embodiment according to the first aspect of present invention, step (a) further comprises a step (vi) of converting into a reactive group one or both of the director groups and/or one or both of the first and second substituent groups to form a monomer having two reactive groups that are capable of participating in polymerisation.

When one or both of the director groups and/or one or both of the first and second substituent groups can be converted into a reactive group that is capable of participating in one of the cross-coupling polymerisation reactions mentioned above, the present method offers a wide variety of novel substituted monomers for the synthesis of conjugated, luminescent oligomers and polymers.

Conversion in step (vi) can be via one or a number of chemical conversion steps.

Suitably, the two reactive groups are para to one another.

A carboxamide director group can be reduced to a tertiary amine and ultimately converted into CH<sub>2</sub>Cl or CH<sub>2</sub>Br for Gilch polymerisation. A urethane director group can be cleaved to phenol, converted into triflate and subjected to metal-mediated cross coupling to give poly(arylene)s, poly(arylene-vinylenes) by the Heck reaction (for example) or poly(arylene ethylenes) by Sonogashira polycondensation.

Many aromatic and heteroaromatic precursors could be prepared by the present method. Boronate and halo-substituted precursors for Suzuki cross coupling of substituted fluorene derivatives could be made in processes leading to novel conjugated materials. Stannane precursors are suitable for use in Stille cross-coupling polymerisation. Preferably the present method can be used to prepare bis(halomethyl) precursors for Gilch dehydrohalogenation.

In accordance with the present method, reaction of the metallated derivative with CF<sub>3</sub>CO<sub>2</sub>Et would lead to the corresponding mono- or bis trifluoroacetyl-substituted derivatives which through Horner poly condensation can yield novel CF<sub>3</sub>-substituted poly(arylene vinylene) derivatives.

In specific examples of this third embodiment, each director group independently can be converted to a phosphonate, a carbonyl, a triflate or a halomethyl reactive group. Where each director group independently is converted to a halomethyl

group, the first monomer is suitable for use in the Gilch dehydrohalogenation reaction referred to above.

One class of polymer or oligomer which suitably may be prepared in accordance with the second aspect of the present invention includes polymers or oligomers comprising an arylene vinylene repeat unit that is derived from the first monomer. Preferably, the arylene vinylene repeat unit comprises a phenylene vinylene group.


In other specific examples of the above embodiment, each substituent group independently is converted to a halide reactive group. Consequently, the first monomer conveniently can participate in "Yamamoto" polymerisation or "Suzuki" polymerisation as referred to above.

Another class of polymer or oligomer that conveniently can be prepared in accordance with the second aspect of the present invention by the present method is a polymer or oligomer comprising a phenylene repeat unit that is derived from the first monomer.

A polymer or oligomer prepared in accordance with the method described in the first aspect of the present invention is provided in a second aspect of the present invention.


In the third aspect of the present invention, it is preferred that the two linked positions are para to one another. A linked position is a position on the aromatic or heteroaromatic group which is covalently linked (usually by a C-C bond) to a further group in the polymer or oligomer chain.

It is further preferred that the aromatic or heteroaromatic group comprises a group having general formula I:



(I)

Preferably, a polymer or oligomer in accordance with the third aspect of the present invention, has a repeat unit comprising an aromatic or heteroaromatic group comprising a group having general formula II:




(II)


The first and second director groups X and Y in the third aspect of the present invention may be as defined above in relation to the first aspect of the present invention.

It is preferred that an oligomer or polymer in accordance with the third aspect of the present invention is an emissive, preferably luminescent, polymer or oligomer, even more preferably, having a band gap in the range 1.5 eV to 3.5 eV.

Polymers and oligomers of particular interest which are in accordance with the third aspect of the present invention are those shown below:

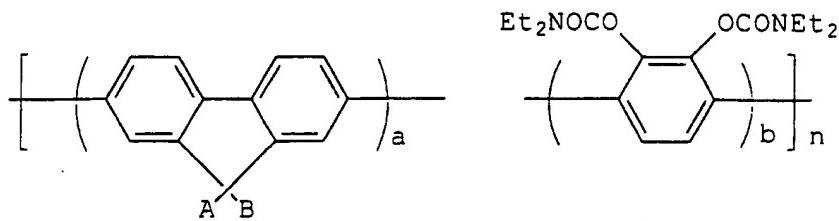

or

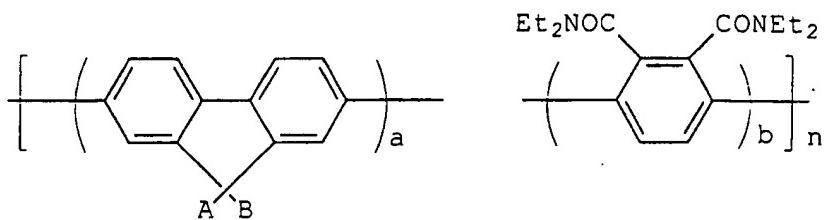

where A and B are the same or different and are each H or alkyl, cyclo- or branched-alkyl; n is in the range from 2 to 100, preferably n is about 6; and  $1 < a < 10$ , preferably a is 1 and  $1 < b < 10$ , preferably b is 1.

The C9 substituents A and B on the fluorene comonomers can be selected to improve the solubility of the polymer or oligomer. In this regard, preferred C9 substituents are  $\text{C}_6\text{H}_{13}$  and  $\text{C}_8\text{H}_{17}$ .


In the fourth aspect of the present invention, it is preferred that the polymer or oligomer has a repeat unit comprising the group shown in general formula III:



Also, it is preferred that X' is SiR<sub>1</sub>R<sub>2</sub>R<sub>3</sub> and Y' is SiR'<sub>1</sub>R'<sub>2</sub>R'<sub>3</sub> and R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub>, R'<sub>1</sub>, R'<sub>2</sub>, and R'<sub>3</sub> independently is alkyl or cycloalkyl. Even more preferably, X' and Y' each independently is SiMe<sub>2</sub>C<sub>10</sub>H<sub>21</sub> or SiMe<sub>2</sub>C<sub>8</sub>H<sub>17</sub>.

A polymer of particular interest in accordance with the fourth aspect of the present invention comprises a homopolymer. The term "homopolymer" may be taken to mean that it has been prepared from a single type of monomer. In this regard, a monomer is distinguished from a repeat unit because a homopolymer could be defined as having more than one different repeat unit.

Preferably, the homopolymer has the formula:

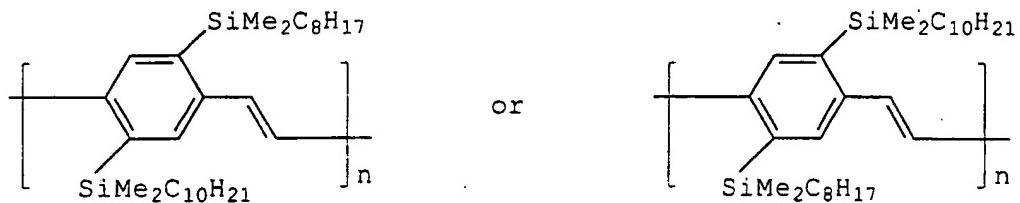

where n is from 4 to 200, preferably 4 to 100.

It is preferred that a polymer or oligomer in accordance with the fourth aspect of the present invention is a luminescent polymer or oligomer. More preferably, the polymer or oligomer has a band gap in the range 1.5 eV to 3.5 eV.

The fifth aspect of the present invention provides an optical device or component therefor comprising a substrate and a polymer that is in accordance with the second, third or fourth aspect of the present invention supported on the substrate.

In this fifth aspect, an optical device or component therefor is provided comprising: an anode; a cathode; optionally one or more charge transport layers; and a light-emissive layer located between the anode and cathode for accepting and combining positive and negative charge carriers to generate light; wherein the light-emissive layer comprises a polymer or oligomer in accordance with any one of the second, third or fourth aspects of the present invention.

Preferably, the cathode material has a suitable workfunction to inject electrons, for example Ca, Al, LiF-Al, or CsF-Al. Also preferably, the anode material has a suitable workfunction to inject protons.

It is preferred that the optical device or component therefor comprises an electroluminescent device.

In the sixth aspect of the present invention, when a polymer or oligomer in accordance with any one of the second, third or fourth aspects of the present invention is used in an optical device, it is preferred that the optical device comprises an electroluminescent device.

The present invention provides also the use of a polymer or oligomer as defined in the second, third or fourth aspect, as a light-emissive material.

The present invention will be described now in further detail with reference to the attached Figures in which:

Figure 1 shows absorption, electroluminescence (EL) and photoluminescence (PL) spectra for the C<sub>8</sub>C<sub>10</sub> polymer where a.u. means arbitrary units;

Figure 2 shows the absorption spectra for each of the C<sub>8</sub>C<sub>10</sub>, C<sub>8</sub>C<sub>8</sub>, C<sub>10</sub>C<sub>10</sub> and DMOS-PPV polymers;


Figure 3 shows the electroluminescent (EL) spectra for each of the C<sub>8</sub>C<sub>10</sub>, C<sub>8</sub>C<sub>8</sub>, C<sub>10</sub>C<sub>10</sub> and DMOS-PPV polymers;

Figure 4 shows the photoluminescent (PL) spectra for each of the C<sub>8</sub>C<sub>10</sub>, C<sub>8</sub>C<sub>8</sub>, C<sub>10</sub>C<sub>10</sub> and DMOS-PPV polymers; and

Figure 5 shows current density and luminescence for a device made from C<sub>8</sub>C<sub>10</sub> polymer with a PEDOT:PSS layer and Al cathode.

Figure 6 shows an electroluminescence spectrum of polymer 12, as measured on an LED structure comprising a PEDOT:PSS hole injecting layer, and aluminium cathode.

The reaction scheme set out below exemplifies the conversion step (vi).

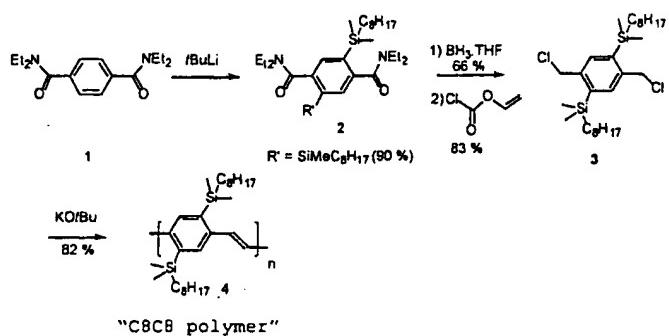


The above scheme illustrates the metalation of the bis-amide 1 to yield a bis-metallated derivative and eventually the bis-silylated precursor 2. This has in turn been polymerised to the corresponding conjugated polymer. The example shown yields the poly(2,5-bisdimethyloctylsilyl-1,4-phenylene vinylene)derivative. The advantage with the present method is

the high yielding process for the synthesis of a precursor (3) and the avoidance of the carcinogenic chloromethyl methyl ether.

In principle any precursor analogue of 2 containing an aryl or heteroaryl group can be prepared by a C-C coupling reaction.

Figure 6 shows an electroluminescence spectrum of polymer 12, as measured on an LED structure comprising a PEDOT:PSS hole injecting layer, and aluminium cathode.

The precursor 7 shown below comprising an asymmetric phenylene group has been prepared with surprising efficiency. This has been converted in to the "C<sub>8</sub>C<sub>10</sub> polymer" that is a highly luminescent unsymmetrically substituted PPV derivative. The poly(2,5-bisdimethyloctylsilyl-1,4-phenylene vinylene) ("C<sub>10</sub>C<sub>10</sub> polymer") has also been prepared

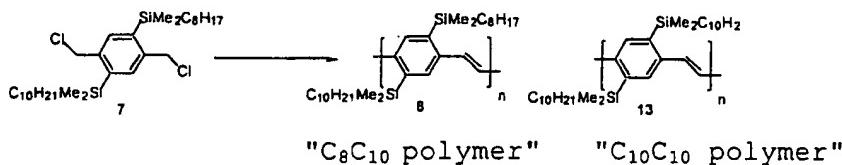


The above examples illustrate processes for the synthesis of poly(2-dimethyloctylsilyl-1,4-phenylene-vinylene) CDMOS-PPV polymer 6) and poly(2,5-bisdimethyloctylsilyl-1,4-phenylene)-vinylene (C<sub>8</sub>C<sub>8</sub> polymer 4) and the C<sub>10</sub>C<sub>10</sub> polymer 13 as well as the unsymmetrical C<sub>8</sub>C<sub>10</sub> polymer 8. These polymers exhibit a PL efficiency in the range 47-57% in the solid state and can be fabricated as the emissive layer in polymer LEDs in which ITO (on glass) and Al are the metal contacts.


The absorption spectra for C<sub>8</sub>C<sub>10</sub> polymer 8, C<sub>10</sub>C<sub>10</sub> polymer 13 and DMOS-PPV 6 are very similar (both the wavelength for peaks and the relative strength of the features). However, C<sub>8</sub>C<sub>8</sub> polymer 3 shows a blue-shift of more than 8 nm with respect to the other spectra and has a much more pronounced UV feature as well.

Both EL and PL spectra for all four polymers are very similar, with the longest wavelength of the first peak in DMOS-PPV 6 and the shortest in C8C10 polymer 8. The vibronic structure is well resolved in both series of spectra and there is no indication of interference effects in microcavities that alter the spectra. PL efficiencies are reported.

The reaction scheme set out below further exemplifies the conversion step (vi).

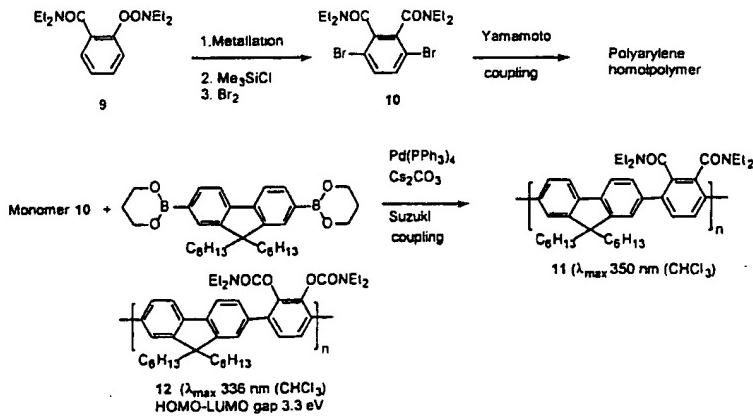

The 'Suzuki cross coupling of the monomer 10 and the related carbamate afford the blue emitting materials 11 and 12 respectively. Evidence of emission in the UV region of the spectrum is detected.

**EXAMPLES****Example 1****Preparation of 2-Dimethyloctylsilyl-tetra-N-ethyl-terephthalamide**

Tert-butyllithium (253 ml, 0.43 mmol) was added to tetra-N-ethyl-terephthalamide (100 mg, 0.36 mmol) in 30 ml of anhydrous tetrahydrofuran cooled with a bath of acetone-nitrogen. After 30', chlorodimethyloctylsilane (102 ml, 0.43 mmol) was added. The mixture was left to reach room temperature in its bath over three hours. Brine water was added and extracted with dichloromethane. The organic extract was dried with magnesium sulphate and concentrated *in vacuo*. Column chromatography using hexane / ethyl acetate (60 / 40) as an eluant (*R*<sub>f</sub> = 0.54 ; hexane / ethyl acetate (85 / 25)) gave a white solid(Yield: 78 %). Mp = 46 °C

**Spectral Results**

IR (KBr) in cm<sup>-1</sup>: 2972, 2926, 2854, 1623, 1484, 1430, 1383, 1291, 1251, 1220, 1105, 1062, 842.

<sup>1</sup>H-NMR δ<sub>H</sub> (CDCl<sub>3</sub>, 250 MHz) 7.40 (d, 1 H, J = 1.57 Hz), 7.22 (dd, 1H, J<sub>1</sub> = 7.75 Hz, J<sub>2</sub> = 1.57 Hz), 7.09(d, 1 H, J = 7.75 Hz), 3.45-3.36 (m, 4 H), 3.06-2.98 (m, 4H), 1.15-0.90 (m, 25 H), 0.74-0.64 (m, 4 H), 0.12 (s, 6 H).

<sup>13</sup>C-NMR δ<sub>C</sub>(CDCl<sub>3</sub>, 62.5 MHz) 171.6, 171.0, 143.6, 137.4, 136.5, 132.8, 126.3, 125.6, 43.4, 38.9, 33.5, 31.8, 29.2, 29.1, 23.8, 22.5, 15.9, 14.0, 13.6, 12.7, -2.3.


Mass Spectrometry: (CI) m/z 447.3400 (M<sup>+</sup>) C<sub>40</sub>H<sub>80</sub>N<sub>2</sub>O<sub>2</sub>Si requires M 446.7400.

found C: 69.99%, H: 10.22%, N: 6.27%

calc.: C: 69.90%, H: 10.39%, N: 6.27%

### Example 2

#### Preparation of 2-Dimethyloctylsilyl-5-dimethyldecylsilyltetra-N-ethyl-terephthalamide



At -78°C, sec-butyllithium (2.9ml, 3.7 mmol) was added to a solution of tetramethylethylenediamine (0.55ml, 3.7 mmol) in 15 ml of dry tetrahydrofuran. 2-dimethyloctylsilyl-tetra-N-ethyl-terephthalamide (1.26 g, 2.8 mmol) in 15 ml of dry tetrahydrofuran was added drop wise and the mixture was stirred at -78°C for 20'. After addition of chlorodimethyloctylsilane (1 ml, 3.7 mmol), the reaction was left to reach room temperature in its bath overnight. Brine water was added and extracted with dichloromethane. The organic extract was dried with magnesium sulphate and concentrated in vacuo. Column chromatography using hexane / ethylacetate (80 / 20) as an eluent (R<sub>f</sub> = 0.41; hexane / ethyl acetate (80 / 20)) gave a white solid (Yield: 85 %).

### Spectral Results

IR (KBr) in  $\text{cm}^{-1}$ : 2955, 2922, 2852, 1635, 1482, 1455, 1424, 1380, 1276, 1247, 1129, 1086, 868, 839, 813.

$^1\text{H-NMR}$   $\delta_{\text{H}}$  ( $\text{CDCl}_3$ , 250 MHz) 7.33 (s, 2H), 3.54 (q, 4H,  $J = 7.15$  Hz), 3.12 (q, 4H,  $J = 7.15$  Hz), 1.30-0.52 (m, 50 H), 0.21 (s, 12 H).

$^{13}\text{C-NMR}$   $\delta_{\text{C}}$  ( $\text{CDCl}_3$ , 62.5 MHz) 172.4, 142.2, 137.3, 132.2, 43.3, 38.9, 33.7, 31.9, 29.7, 29.4, 24.0, 22.7, 16.0, 14.1, 13.8, 12.8, -2.3.

Mass Spectrometry: (CI)  $m/z = 644.5132$ .


Elemental analysis (645.17 for  $\text{C}_{38}\text{H}_{72}\text{N}_2\text{O}_2\text{Si}$ )

found C: 70.84%, H: 11.26%, N: 4.39%

calc.: C: 70.75%, H: 11.25%, N: 4.34%

### Example 3

#### Preparation of 2-Dimethyloctylsilyl-5-dimethyldecylsilyl-tetra-N-ethyl-p-xylylenediamine



To a stirred solution of 2-dimethyloctylsilyl-5-dimethyldecylsilyl-tetra-N-ethyl-terephthalamide (1.3 g, 2.3 mmol) in 30 ml of dry tetrahydrofuran was added borane-tetrahydrofuran complex (23 ml, 23 mmol). The reaction was refluxed for 18 h. Water was added carefully until the liberation of hydrogen stopped. The mixture was concentrated in vacuo and 6M hydrochloric acid was added. The aqueous solution was heated at reflux for 4 h. The solution was cooled and adjusted to pH 9 with sodium hydroxide. The aqueous phase

was extracted with dichloromethane. The combined organic phases were dried with magnesium sulphate and concentrated in vacuo. Column chromatography using hexane / ethyl acetate (96 / 4) as an eluent ( $R_f = 0.79$ ; hexane / ethyl acetate (80 / 20)) gave a white solid (Yield: 52 %). Mp = 26°C

#### Spectral Results

IR ( $\text{CHCl}_3$ ) in  $\text{cm}^{-1}$ : 2963, 2922, 2852, 1466, 1370, 1248, 1203, 1166, 1121, 1057, 835.


$^1\text{H-NMR}$   $\delta_{\text{H}}$  ( $\text{CDCl}_3$ , 250 MHz) 7.71 (s, 2 H), 3.63 (s, 4 H), 2.51 (q, 8H,  $J = 7.10$  Hz), 1.30-0.81 (m, 50 H), 0.30 (s, 12 H).

$^{13}\text{C-NMR}$   $\delta_{\text{C}}$  ( $\text{CDCl}_3$ , 62.5 MHz) 143.2, 137.821, 134.7, 58.6, 46.2, 33.7, 31.9, 29.7, 29.3, 24.2, 22.7, 16.6, 14.1, 11.7, -1.3.

Mass Spectrometry: (MALDI)  $m/z$  618.30 ( $M\text{H}^+$ )

#### Example 4

##### Preparation of 2-Dimethyldecylsilyl-5-dimethyldecylsilyl-1,4-bis(chloromethyl)benzene



At 0°C, vinyl chloroformate (70.3 ml, 82.7 mmol) was added to 2-dimethyldecylsilyl-5-dimethyldecylsilyl-tetra-*N*-ethyl-p-xylylenediamine (663 mg, 1.09 mmol) in 20 ml of dry

dichloromethane. The mixture was stirred at room temperature for 5 h. Brine water was added and the aqueous phase was extracted with dichloromethane. The combined organic phases were dried with magnesium sulphate and concentrated in vacuo. Column chromatography using hexane as an eluant ( $R_f = 0.46$ ; hexane) gave a white solid (Yield: 65%).  $M_p = 40^\circ\text{C}$ .

#### Spectral Results

IR ( $\text{CHCl}_3$ ) in  $\text{cm}^{-1}$ : 2923, 2854, 1466, 1411, 1377, 1344, 1254, 1192, 1172, 1140, 1108, 837, 792, 716.

$^1\text{H-NMR}$   $\delta\text{H}$  ( $\text{CDCl}_3$ , 250 MHz) 7.57 (s, 2 H), 4.70 (s, 4 H), 1.36-1.29 (m, 29 H), 0.92-0.83 (m, 9 H), 0.42 (s, 12 H).

$^{13}\text{C-NMR}$   $\delta\text{C}$  ( $\text{CDCl}_3$ , 62.5 MHz) 141.9, 140.2, 137.0, 46.5, 33.6, 32.0, 29.7, 29.6, 29.4, 29.3, 24.0, 22.7, 16.5, 14.1, -1.5.


elemental analysis:

found C: 66.52%, H: 10.31%

calc.: C: 66.38%, H: 10.41%

#### Example 5

#### Preparation of Poly [2-(dimethyloctylsilyl)-5-(dimethyldecylsilyl)-1,4-phenylene vinylene]



To a degassed solution of 2-dimethyldecylsilyl-5-dimethyldecylsilyl-1,4-bis(chloromethyl)benzene (109mg, 0.2mmol) in 1.5ml of dry tetrahydrofuran was added a degassed solution of potassium-tert-butoxide (112.5mg, 1mmol) in 5ml of dry tetrahydrofuran over 10'. The mixture was stirred under nitrogen overnight. The solution was poured into methanol to give bright yellow flaks. The polymer was reprecipitated in acetone and dried overnight. (Yield: 26 %)

#### Spectral Results

UV (CHCl<sub>3</sub>) δ<sub>max</sub>: 438 nm

UV (film) δ<sub>max</sub>: 430 nm

Mn (GPC) 289000 ; Mw (GPC) 1065000 ; PD = 3.7

<sup>1</sup>H-NMR (CDCl<sub>3</sub>, 250 MHz) d/ppm vs.

TGA: decomposition at 350 °C.

DSC: decomposition at 300 °C. no T<sub>g</sub>, no mp

#### Example 6: Device fabrication

Single and double layer devices featuring a hole conduction/electron blocking layer of PEDOT:PSS were prepared on ITO substrates with two different cathode metals (Al, Ca). Single and double layer devices were fabricated. Quantitative data is given only for double layer devices with a PEDOT:PSS layer.

Solvents for spin coating were either THF, and xylene or toluene. Tetrachloroethane was used for DMOS-PPV.

**Table 1 Summary of devices made with a 40 nm PEDOT:PSS hole conduction layer. All values are maximum values.**

	PL % /m <sup>2</sup>	Alcd cd/m <sup>2</sup>	Ca cd/m <sup>2</sup>	Al cd/A	Ca cd/A	turn-on voltages 0.1 cd/m <sup>2</sup> (0.01cd/m <sup>2</sup> ) with Al	turn-on voltages 0.1cd/m <sup>2</sup> (0.01 cd/m <sup>2</sup> ) with Ca
C <sub>8</sub> C <sub>8</sub> 3 HR50	47 %	20	62	0.4 5	0.23	14 V (13 V)	13V (12V)
DMOS-PPV 6 FGB17671	57% 6	140	12	0.4 0	0.03	14 V	13V (12V)
C <sub>8</sub> C <sub>10</sub> 8 FGC28139	57% 8	260	36	0.2 3	0.05	8V (7V)	6V (5V)
C <sub>10</sub> C <sub>10</sub> 13 FGC28138	53% 8	31	113	0.1 6	0.20	12V (10 V)	7V (6V)

Film thicknesses: 3:100 nm; 6: 90 nm; 8: 70 nm; 13: 120 nm

Various spectral results are shown in Figures 1 to 5. Other than for the C<sub>10</sub>C<sub>10</sub> polymer 13 the best results were obtained using Al cathodes. The turn-on voltage using the C<sub>8</sub>C<sub>10</sub> polymer 8 was lower than for the other materials (especially with Al cathodes). Thickness of the luminescent layer could be an important factor as well (the C<sub>8</sub>C<sub>10</sub> polymer 8 and the C<sub>10</sub>C<sub>10</sub> polymer 13 require the same field, which is lower than the one required for the C<sub>8</sub>C<sub>8</sub> polymer 3 and DMOS-PPV 6).

The efficiency of the DMOS-PPV devices compares well with previous studies using this polymer. The highest efficiency in this study was measured using C<sub>8</sub>C<sub>8</sub> polymer 3, while the highest luminescence was achieved using C<sub>8</sub>C<sub>10</sub> polymer 8. This finding

is in keeping with the surprising advantages in making a polymer having a first monomer comprising an asymmetric aromatic or heteroaromatic group in accordance with the present invention.

**CLAIMS:**

1. A method for making a polymer or oligomer comprising the steps of:

(a) making a first monomer comprising a substituted aromatic or heteroaromatic group by:

(i) providing an aromatic or heteroaromatic group substituted with first and second director groups;

(ii) performing metalation at a first position on the aromatic or heteroaromatic group;

(iii) performing electrophilic substitution so as to provide a first substituent group at the first position; and

(b) contacting in a reaction mixture the first monomer with at least two further monomers that independently are the same or different from the first monomer under conditions so as to form a polymer or oligomer;

wherein the nature and positions of the first and second director groups regioselect the first position.

2. A method according to claim 1, wherein step (a) further comprises:

(iv) performing metalation at a second position on the aromatic or heteroaromatic group; and

(v) performing electrophilic substitution so as to provide a second substituent group at the second position;

wherein the nature and positions of the first and second director groups regioselect the second position.

3. A method according to any one of the preceding claims wherein the first and/or second substituent group independently are selected from the group consisting of halide,  $B(OH)_2$ ,  $B(OR)_2$ , organo stannane, alkoxy, alkoxyalkyl,

alkyl, hydroxide, aryl, heteroaryl, silyl, triflate and amide, and COCF<sub>3</sub>.

4. A method according to claim 3, wherein the first and/or second substituent groups independently are selected from the group consisting of Br, I, SiMe<sub>2</sub>C<sub>8</sub>H<sub>17</sub>, SiMe<sub>2</sub>C<sub>10</sub>H<sub>21</sub>, and SiMe<sub>3</sub>.

5. A method according to any one of the preceding claims wherein metalation is performed by the addition of organolithium.

6. A method according to any one of the preceding claims, wherein the nature and positions of the first and second director groups regioselect the first position to be ortho to the first director group.

7. A method according to any one of claims 2 to 6, wherein the nature and positions of the first and second director groups regioselect the second position to be ortho to the second director group.

8. A method according to any one of the preceding claims wherein the first and second director groups are the same or different and independently are selected from alkoxy, alkoxyalkyl, amide, halide, haloalkyl, amino, aminoalkyl, carboxylic acid ester, urethane, carbamate, sulphonamide, sulphurylalkyl, or carbamide group.

9. A method according to claim 8, wherein the first and second director groups are the same or different and independently are selected from the group consisting of CONEt<sub>2</sub>, CONHCMe<sub>2</sub>Ph, OCONMeCMe<sub>2</sub>Ph, OCONEt<sub>2</sub>, SO<sub>2</sub>NHCMe<sub>2</sub>Ph, and SO<sub>2</sub>-tBu.

10. A method according to any one of the preceding claims, wherein the first and second director groups are different
11. A method according to any one of claims 1 to 9, wherein the first and second director groups are the same.
12. A method according to any one of the preceding claims wherein the aromatic or heteroaromatic group is selected from a phenylene, fluorene, anthracene or naphthalene group.
13. A method according to any one of the preceding claims wherein step (a) further comprises a step (vi) of independently converting into a reactive group one or both of the director groups and/or one or both of the first and second substituent groups to form a monomer having two reactive groups that participate in polymerisation.
14. A method according to claim 13 wherein the two reactive groups are para to one another.
15. A method according to claim 13 or claim 14, wherein each director group independently is converted to a phosphonate, a carbonyl, a triflate or a halomethyl group.
16. A method according to claim 15, wherein the polymer or oligomer comprises an arylene vinylene repeat unit that is derived from the first monomer.
17. A method according to claim 16, wherein the arylene vinylene unit comprises a phenylene vinylene group.


18. A method according to claim 13 or claim 14, wherein each substituent groups independently is converted to a halide group.

19. A method according to claim 18, wherein the polymer or oligomer comprises a phenylene repeat unit that is derived from the first monomer.

20. A polymer or oligomer prepared in accordance with the method defined in any one of claims 1 to 19.

21. A polymer or oligomer preparable in accordance with the method defined in any one of claims 1 to 5, having a repeat unit comprising an aromatic or heteroaromatic group with first and second linked positions and first and second director groups X and Y where X is ortho to the first linked position and Y is ortho to the second linked position and where X and Y are the same or different and independently comprise a hydroxyl, alkoxy, alkoxyalkyl, amide, halide, haloalkyl, amino, aminoalkyl, carboxylic acid ester, urethane, carbamate, sulphonamide, sulphurylalkyl, or carbamide group; and A is C, O, S or NR and n = 0; or A is C or NR, B is C or NR and n=1; and R is a pendant group.

22. A polymer or oligomer according to claim 21, comprising a group having general formula I:



(I)

where X and Y are as defined in claim 21.

23. A polymer or oligomer according to claim 22 having a repeat unit comprising an aromatic or heteroaromatic group comprising a group having general formula II:




where X and Y are as defined in claim 22.

24. A polymer or oligomer according to any one of claims 21 to 23 wherein the first and second director groups are as defined in any one of claims 9 to 11.


25. A polymer or oligomer according to any one of claims 21 to 24 which is a luminescent polymer or oligomer.

26. A polymer or oligomer according to claim 25 having a bandgap in the range 1.5 eV to 3.5 eV.

27. A polymer or oligomer according to claim 26 having general formula:

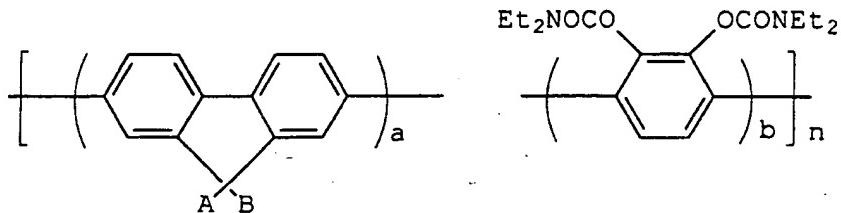

or

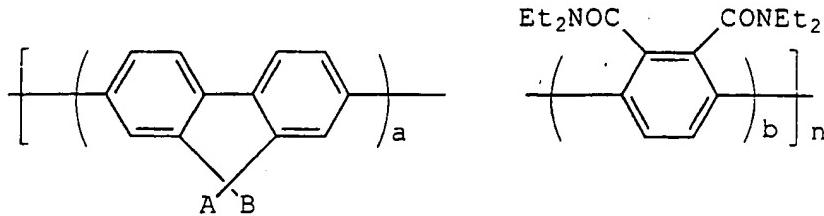

where A and B are the same or different and are each H, alkyl, cyclo-or branched-alkyl; n is in the range from 2 to 100 and 1<a<10 and 1<b<10.

28. A polymer or oligomer preparable in accordance with the method defined in any one of claims 1 to 5 having a repeat unit comprising a substituted or unsubstituted vinylene group and an aromatic or heteroaromatic group having first and second silyl substituent groups X' and Y' that are different from each other where X' is ortho to a first linked position and Y' is ortho to the vinylene group.

29. A polymer or oligomer according to claim 28, having a repeat unit comprising the group shown in general formula III:




where X' and Y' are as defined in claim 28.

30. A polymer or oligomer according to claim 28 or claim 29, where X' is SiR<sub>1</sub>R<sub>2</sub>R<sub>3</sub> and Y' is SiR'<sub>1</sub>R'<sub>2</sub>R'<sub>3</sub> and R<sub>1</sub>, R<sub>2</sub>, R<sub>3</sub>, R'<sub>1</sub>, R'<sub>2</sub>, and R'<sub>3</sub> independently is alkyl or cycloalkyl.

31. A polymer or oligomer according to claim 30, where X' and Y' each independently is SiMe<sub>2</sub>C<sub>10</sub>H<sub>21</sub> or SiMe<sub>2</sub>C<sub>8</sub>H<sub>17</sub>.

32. A polymer or oligomer according to any one of claims 28 to 31 which comprises a homopolymer.


33. A polymer or oligomer according to claim 32 comprising a homopolymer having the formula:

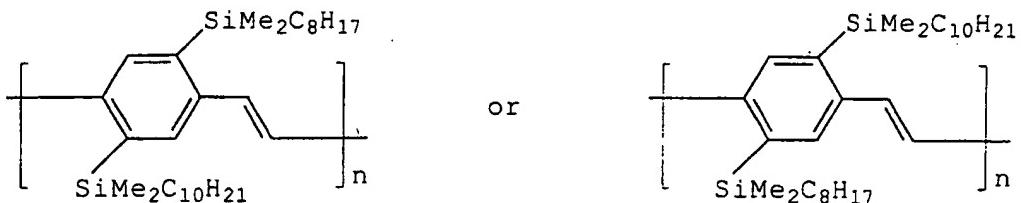


where n is from 4 to 200.

34. A polymer or oligomer preparable in accordance with the method defined in any one of claims 1 to 5 having a repeat unit comprising an unsubstituted vinylene group and an aromatic or heteroaromatic group having first and second SiMe<sub>2</sub>C<sub>10</sub>H<sub>21</sub> substituent groups where the first substituent group is ortho to a first linked position and the second substituent group is ortho to the vinylene group.

35. A polymer or oligomer according to claim 34, having a repeat unit:

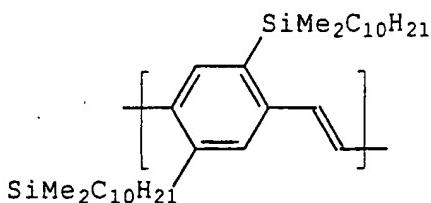

36. A polymer or oligomer according to claim 35, comprising a homopolymer having the formula:

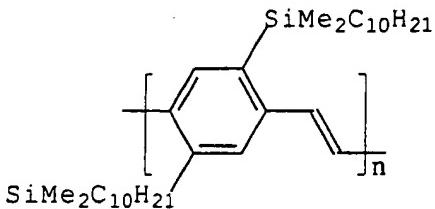

where n is from 4 to 200.

37. A polymer or oligomer according to any one of claims 28 to 36 which is a luminescent polymer or oligomer.

38. A polymer or oligomer according to claim 37 having a band gap in the range 1.5 eV to 3.5 eV.

39. An optical device for a component therefor, which comprises a substrate and a polymer as defined in any one of claims 20 to 38 supported on a substrate.

40. An optical device or component therefor comprising:

an anode;

a cathode;

a light-emissive layer located between the anode and the cathode for accepting and combining positive and negative charge carriers to generate light;

wherein the light-emissive layer comprises a polymer or oligomer as defined in any one of claims 20, 25, 26, 37 or 38.

41. An optical device or a component therefor according to claim 40, wherein the optical device comprises an electroluminescent device.

42. Use of a polymer or oligomer as defined in any one of claims 20 to 38 in an optical device.

43. Use of a polymer or oligomer according to claim 42, wherein the optical device comprises an electroluminescent device.

44. Use of a polymer or oligomer as defined in any one of claims 20, 25, 26, 37 or 38 as a light-emissive material.

45. A method for making an optical device or component therefor comprising the steps of:

(a) providing a polymer or oligomer as defined in claim 20, 25, 26, 37 or 38; and

(b) including the polymer or oligomer in an optical device or component therefor.

1/6

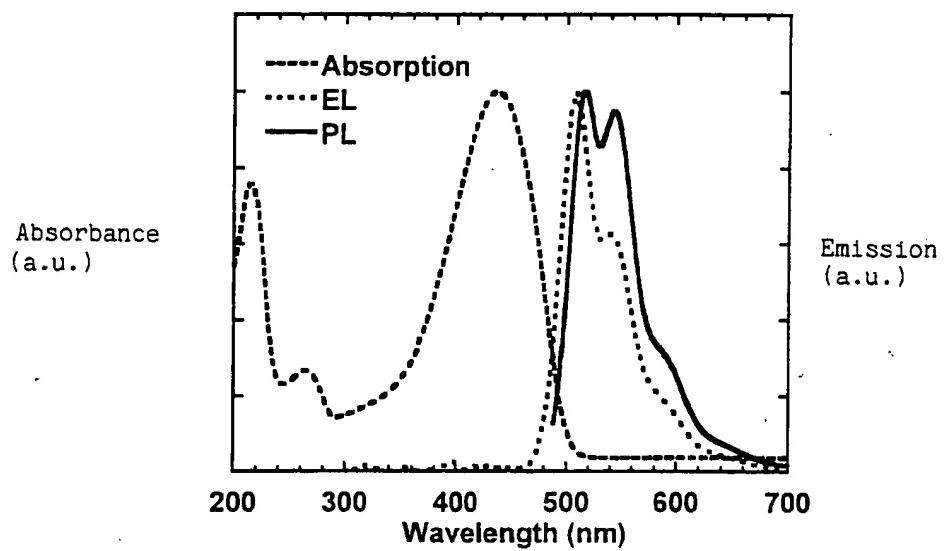


Figure 1

2/6

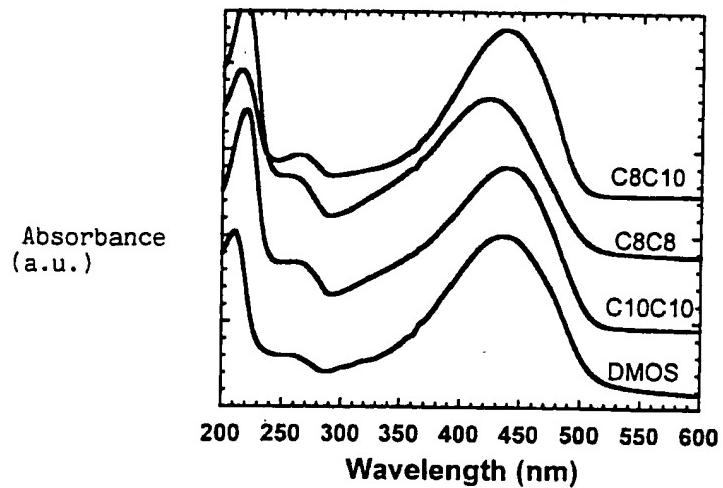


Figure 2

3/6

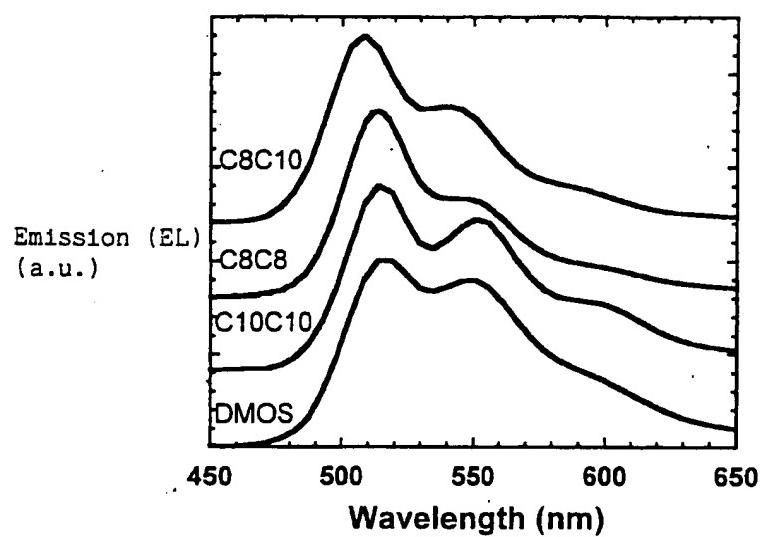


Figure 3

4/6

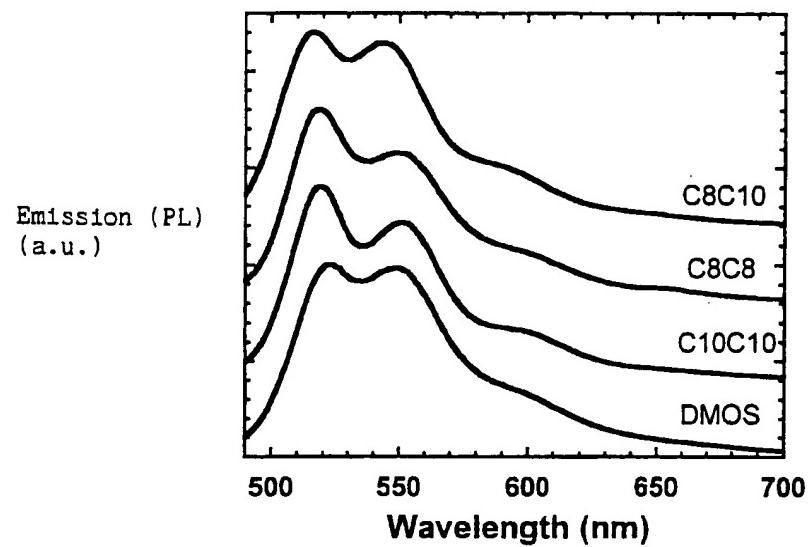


Figure 4

5/6

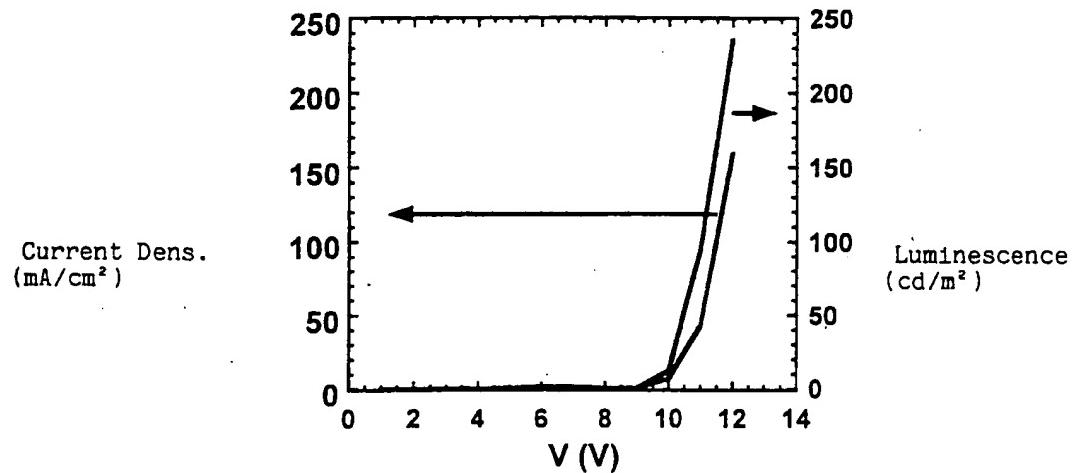


Figure 5

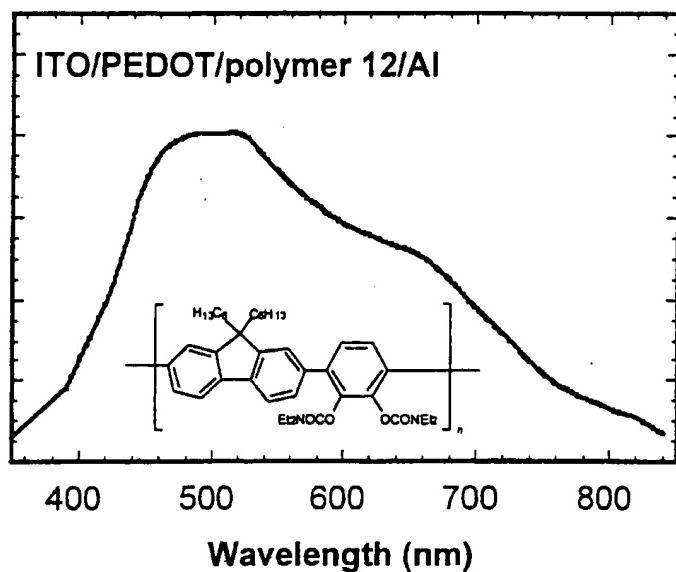


Figure 6

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
1 February 2001 (01.02.2001)

PCT

(10) International Publication Number  
**WO 01/07502 A3**

(51) International Patent Classification<sup>7</sup>: C08G 61/10, 61/02, C09K 11/06 (74) Agents: DANIELS, Jeffrey, Nicholas et al.; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).

(21) International Application Number: PCT/GB00/02850

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(22) International Filing Date: 24 July 2000 (24.07.2000)

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

Published:

(26) Publication Language: English

- With international search report.
- Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

(30) Priority Data:  
9917356.9 24 July 1999 (24.07.1999) GB

(88) Date of publication of the international search report:  
22 March 2001

(71) Applicant (*for all designated States except US*): CAMBRIDGE DISPLAY TECHNOLOGY LIMITED [GB/GB]; Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0HJ (GB).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): HOLMES, Andrew, Bruce [AU/GB]; 19 Newton Road, Cambridge CB2 2AL (GB). GENESTE, Florence, Danielle, Annie [FR/FR]; 3 bis, rue Charles Hardouin, F-35530 Noyal Sur Vilaine (FR). MARTIN, Rainer, Eugen [AT/DE]; Baslerstrasse 23a, D-79639 Grenzach/Wyhlen (DE). CACIALLI, Franco [IT/GB]; 52 Brampton Road, Cambridge CB1 3HL (GB).

WO 01/07502 A3

(54) Title: POLYMERISATION METHOD

(57) Abstract: A method for making a polymer or oligomer comprising the steps of: (a) making a first monomer comprising a substituted aromatic or heteroaromatic group by: (i) providing an aromatic or heteroaromatic group substituted with first and second director groups; (ii) performing metallisation at a first position on the aromatic or heteroaromatic group; (iii) performing electrophilic substitution so as to provide a first substituent group at the first position; and (b) contacting in a reaction mixture the first monomer with at least two further monomers that independently are the same or different from the first monomer under conditions so as to form a polymer or oligomer; wherein the nature and positions of the first and second director groups regioselect the first position.

## INTERNATIONAL SEARCH REPORT

International Application No PCT/GB 00/02850
---

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 C08G61/10 C08G61/02 C09K11/06
--

According to International Patent Classification (IPC) or to both national classification and IPC
---

B. FIELDS SEARCHED
--------------------

Minimum documentation searched (classification system followed by classification symbols) IPC 7 C08G C09K
--

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
---

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
--

EPO-Internal, WPI Data, PAJ
-----------------------------

C. DOCUMENTS CONSIDERED TO BE RELEVANT
--

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 46652 A (CALIFORNIA INST OF TECHN) 22 October 1998 (1998-10-22)  the whole document ---	1-5, 29-33, 39-45
Y	HWANG D -H ET AL: "ELECTROLUMINESCENT PROPERTIES OF NOVEL SILYL-DISUBSTITUTED SOLUBLE PPV DERIVATIVE" MOLECULAR CRYSTALS AND LIQUID CRYSTALS SCIENCE AND TECHNOLOGY. SECTION A. MOLECULAR CRYSTALS AND LIQUID CRYSTALS, GORDON AND BREACH PUBLISHERS, CH,CH, vol. 316, May 1998 (1998-05), pages 281-284, XP000941275 ISSN: 1058-725X the whole document ---	1-5, 29-33, 39-45

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

## ° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search  6 November 2000	Date of mailing of the international search report  23 January 2001
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl. Fax: (+31-70) 340-3016	Authorized officer  Rousseau, F

## INTERNATIONAL SEARCH REPORT

International Application No

PCT, GB 00/02850

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DATABASE WPI Section Ch, Week 199726 Derwent Publications Ltd., London, GB; Class A25, AN 1997-285197 XP002152054 & JP 09 104732 A (SAMSUNG ELECTRONICS CO LTD), 22 April 1997 (1997-04-22) abstract ---	1-5, 29-33, 39-45
Y	LIAN-HUI WANG ET AL.: "Synthesis, spectroscopy and electrochemistry study on a novel di-silyl substituted poly(p-phenylenevinylene)" SYNTHETIC METALS, vol. 105, 9 July 1999 (1999-07-09), pages 85-89, XP000942715 Scheme 1 ---	1-5, 29-33, 39-45
Y	M.R. ANDERSSON ET AL.: "Photoluminescence and electroluminescence of films from soluble PPV-polymers" SYNTHETIC METALS, vol. 85, 1997, page 1275-1276 XP000942764 the whole document ---	1-5, 29-33, 39-45
Y	SNIECKUS V: "COMBINED DIRECTED ORTHO METALATION-CROSS COUPLING STRATEGIES. DESIGN FOR NATURAL PRODUCT SYNTHESIS" PURE & APPLIED CHEMISTRY, PERGAMON PRESS, OXFORD, GB, vol. 66, no. 10/11, 1994, pages 2155-2158, XP000919008 ISSN: 0033-4545 cited in the application the whole document ---	1-5
Y	V. SNIECKUS: "Directed Ortho Metalation. Tertiary Amide and O-Carbamate Directors in Synthetic Strategies for Polysubstituted Aromatics" CHEMICAL REVIEWS, vol. 90, no. 6, 1990, pages 879-933, XP002152053 Scheme 17, page 898 ---	1-5
Y	J. F. BOWER: "Synthesis of 2-Substituted Dihydropyran 3-O-Carbamates via Combined Metalation-Suzuki-Miyaura Cross-Coupling Reactions" J. ORG. CHEM., vol. 63, no. 5, 1998, pages 1514-1518, XP000940872 cited in the application the whole document -----	1-5

## INTERNATIONAL SEARCH REPORT

Int'l application No.  
PCT/GB 00/02850

### Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.: because they relate to subject matter not required to be searched by this Authority, namely:
  
2.  Claims Nos.: 1 to 19, 20 to 22, 24, 25, 26, 28, 37, 38 and 39 to 45 because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:  
see FURTHER INFORMATION sheet PCT/ISA/210
  
3.  Claims Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

### Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1.  As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
  
2.  As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
  
3.  As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
  
4.  No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

29-33, 1-5 (part), 39-45 (part)

#### Remark on Protest

- The additional search fees were accompanied by the applicant's protest.  
 No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box I.2

Claims Nos.: 1 to 19, 20 to 22, 24, 25, 26, 28, 37, 38 and 39 to 45

Present claims 1 to 19, 20 to 22, 24, 25, 26, 28, 37 and 38 relate to an extremely large number of possible processes or compounds. In particular claim 1 does not define the type of aromatic or heteroaromatic group utilised, the type of metalation agent used, the agent used for the substitution and the type of polymerization which should be carried out. A meaningful search over the whole of the claimed scope is therefore impossible because claim 1 (resp. claim 20) relates to an extremely large number of possible processes (resp. products). The same applies for claims 2 to 19 (resp. claims 21, 22, 24, 25, 26, 28, 37 and 38) since the combination of features defined therein does not restrict enough the large number of possible processes (resp. products) in such a manner as to render a meaningful search possible. The same holds true for the subject-matter of claims 39 to 45.

Moreover, present claims 25, 26, 37 and 38 relate to the above defined polymers, wherein a desirable luminescent property and a band gap in the range 1.5 eV to 3.5 eV are defined. An attempt is made to define the polymers by reference to a result to be achieved, without defining the features of the polymers which are necessary in order to achieve said result. These claims therefore do meet the requirements of Art 6 PCT. Again, this lack of clarity in the present case is such as to render a meaningful search over the whole of the claimed scope impossible.

Consequently, a search can be only carried out for those parts of the claims which appear to be supported by the description, namely those parts relating to polymers as defined in present claims 23, 27, 29 to 33 and 34 to 36, their method of synthesis as defined in present claim 9 and their use in optical devices (claims 39 to 45).

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 29-33, 1-5 (part), 39-45 (part)

Polymers as defined in claims 29 to 33, their method of synthesis as defined in present claims 1 to 5 and their use in optical devices (claims 39 to 45), i.e. parts relating to polyphenylenevinylene comprising two different silyl substituent groups X' and Y', where X' is ortho to a first linked position and Y' is ortho to the vinylene group.

2. Claims: 34-36, 1-5 (part), 39-45 (part)

Polymers as defined in claims 34 to 36, to their method of synthesis as defined in present claims 1 to 5 and their use in optical devices (claims 39 to 45), i.e. parts relating to polyphenylenevinylene comprising two identical silyl substituent groups namely a dimethyldecylsilyl substituent which are ortho to a first linked position and ortho to the vinylene group.

3. Claims: 27, 1-5 (part), 39-45 (part)

Polymers as defined in claim 27, to their method of synthesis as defined in present claims 1 to 5 and their use in optical devices (claims 39 to 45).

4. Claims: 23 (part), 1-5 (part), 39-45 (part)

Polymers as defined in claim 24 when referring to claim 23 (polymers wherein the first and second director groups are as defined in present claim 9 to 11 and which are not those defined in claim 27), to their method of synthesis as defined in present claims 1 to 5 and their use in optical devices (claims 39 to 45).

5. Claims: 23 (part), 1-5 (part), 39-45 (part)

Polymers as defined in claim 23 wherein X and Y are not as defined in present claims 9 to 11 (i.e. which are not those as defined in present claim 24), to their method of synthesis as defined in present claims 1 to 5 and their use in optical devices (claims 39 to 45).

**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International Application No

PCT/GB 00/02850

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9846652 A	22-10-1998	AU 7251898 A	11-11-1998
JP 9104732 A	22-04-1997	NONE	

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- BLACK BORDERS**
- IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- FADED TEXT OR DRAWING**
- BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- SKEWED/SLANTED IMAGES**
- COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- GRAY SCALE DOCUMENTS**
- LINES OR MARKS ON ORIGINAL DOCUMENT**
- REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**